


## Audio Panel

### King

### KMA 24

#### Connector

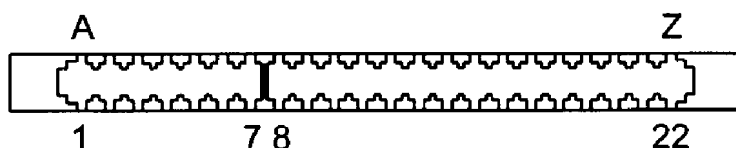

Circuit	Pin #	Notes
14/28 VDC POER (SPKR AMP).....	20	
14/28 VDC POWER (HDPHONE AMP).....	7	
A/C HEADPHONES .....	3	
A/C MIC AUDIO .....	8	
A/C MIC KEY .....	Y	
ADF 1 500 OHM IN .....	S	
ADF 2 500 OHM IN .....	11	Note 1
AIRFRAME GROUND.....	Z	
ALTIMETER WARNING.....	T	
AMBER LAMP .....	4	
BLUE LAMP .....	5	
CABIN SPKR .....	W	
COM 1 500 OHM IN.....	9	
COM 1 MIC AUDIO.....	P	
COM 1 MIC KEY .....	R	
COM 1 SPKR LOAD GROUND.....	L	
COM 1 SPKR LOAD .....	19	
COM 2 500 OHM IN.....	10	
COM 2 MIC AUDIO.....	H	
COM 2 MIC KEY .....	V	
COM 2 SPKR LOAD GROUND.....	M	
COM 2 SPKR LOAD .....	16	

(Continued)

For familiarization only. Consult the manufacturers current data.

*(KMA 24 Continued)*

DIMMER .....	D	Note 2
DIMMER .....	E	Note 2
DIMMER .....	F	Note 2
DME 500 OHM IN .....	6	
EXTERNAL SPKR .....	X	
GROUND .....	1	
HF SPEAKER .....	14	
HF SPKR GROUND.....	N	
HF/TEL 500 OHM IN.....	J	
HF/TEL MIC AUDIO.....	K	
HF/TEL MIC KEY.....	15	
INTERNAL SPKR.....	U	
MARKER RCVR ANTENNA SENSE.....	B	
MARKER RCVR ANTENNA SHIELD .....	A	
MM SENSE.....	2	
NAV 1 500 OHM IN.....	12	
NAV 2 500 OHM IN.....	13	
PA MUTE .....	18	
SPARE .....	21	
SPKR/HDPH GROUND .....	22	
TEL RINGER .....	17	
WHITE LAMP .....	C	

**Notes**

1. On -02 and -03 models, unused and left open.
2. For 14 volts, E and F to ground, D to Dimmer. For 28 volts, F to Dimmer  
D open <sub>p</sub>

For familiarization only. Consult the manufacturers current data.